

Data sheet - series DA - WN



PRODUCT SPECIFICATION

SK H2O protec expansion waterstop series DA according to factory standard is a permanently flexible sealing profile with middle tube made of thermoplastic polymer, PVC-P, that is used to seal expansion joints in waterproof concrete structures with high water pressures.

Characteristics / Advantages

- high tensile strength and elongation at break
- high permanent flexibility and high-load bearing capacity
- suitable for water pressure and settlements
- resistant to all natural media acting aggressively to concrete (if applicable)
- resistant to a wide range of chemical substances (tests required for each additional specific situation)
- standard resistant
- supply of systems for easy handling on site
- weldable by using butt joints on site

Application

- joint sealing in concrete structures
- expansion joint sealing system for in-situ concrete

Typical structures

- commercial buildings, cellars, underground car parks

Data sheet - series DA - WN



Standards / Directives

- general appraisal certificate
- Works standard
- WU- Directives DAfStb
- Welding instructions

Test certificate / Approvals

- general appraisal certificate
- external monitoring by MPA NRW
- internal monitoring

PRODUCT DATA

Material

- PVC-P (Polyvinyl chloride with plasticizer / P: plasticized)

Colour

- black

Packaging

- supplied as standard rolls (25 m), pre-cuts and systems

Data sheet - series DA - WN



MECHANICAL PROPERTIES according to factory standard

Shore A hardness	72 ± 5
-------------------------	------------

Tensile strength	≥ 10 MPa
-------------------------	---------------

Elongation at break	≥ 275 %
----------------------------	--------------

Tear propagation resistance	≥ 12 kN/m
------------------------------------	----------------

Low temperature performance	Elongation at break at $-20^{\circ}\text{C} \geq 200\%$
------------------------------------	---

Performance after weathering	Tensile strength $\leq 20\%$ Elongation at break $\leq 20\%$ Modulus of elasticity $\leq 50\%$
-------------------------------------	--

valid change of average values relative to the initial value

Performance of the weld at shear test short-term joining factor f_z	break outside of weld $\geq 0,6$
---	----------------------------------



Fire behaviour	class B2
-----------------------	----------

values differing for bitumen compatibility



Data sheet - series DA - WN



DA 19

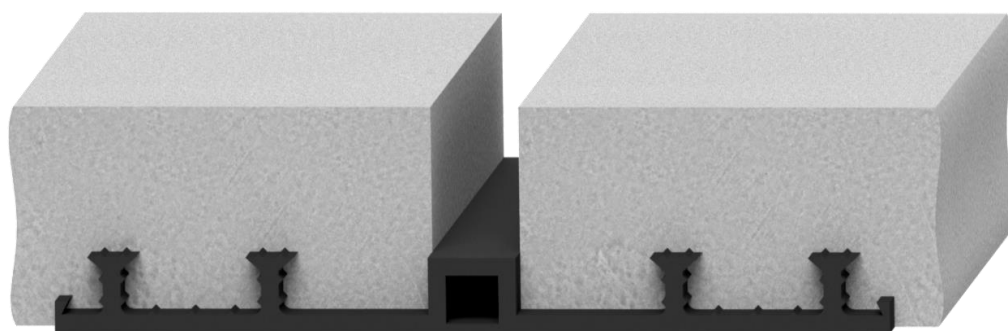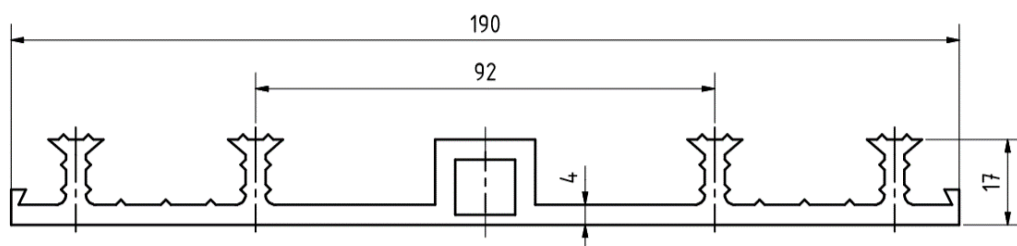

DA 24

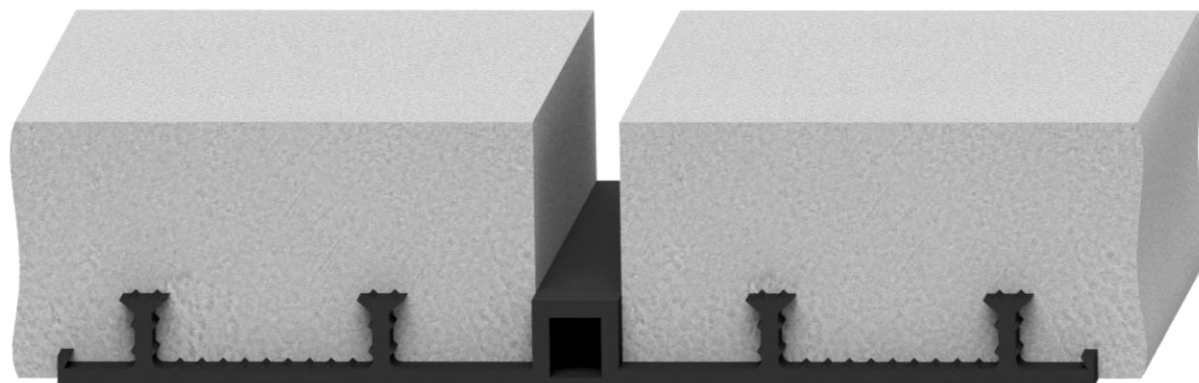
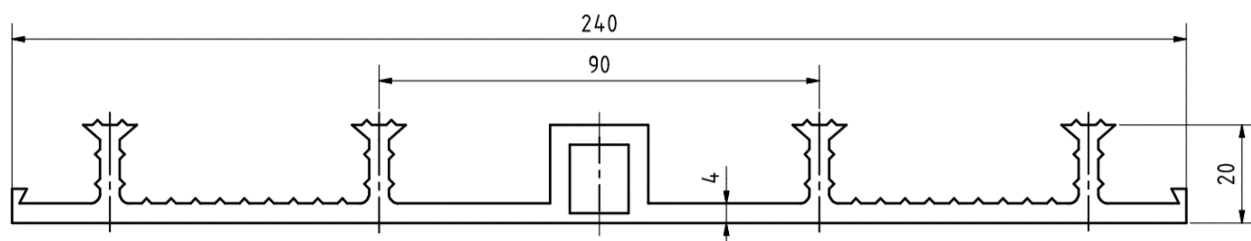


All dimensions in mm



Data sheet - series DA - WN



DAS 24

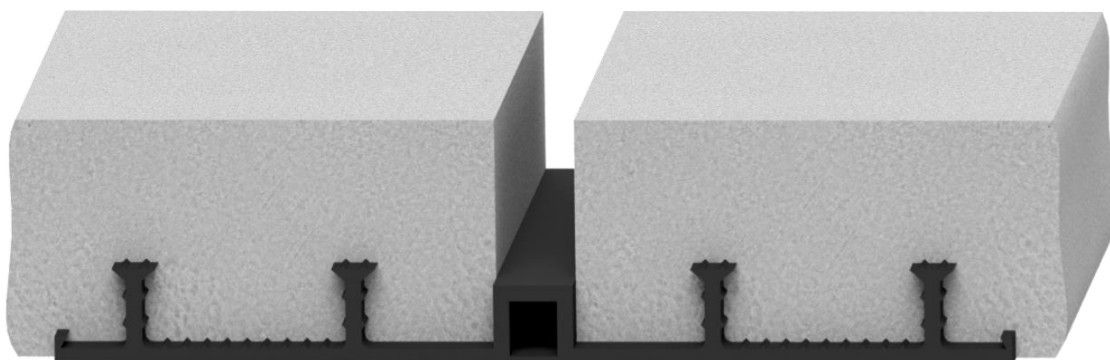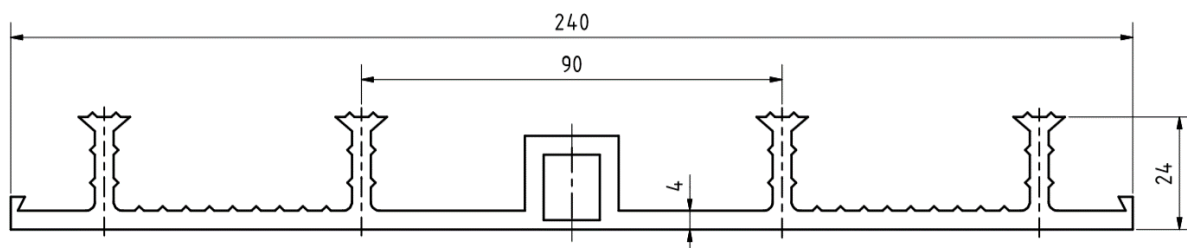

DA 24/3/4

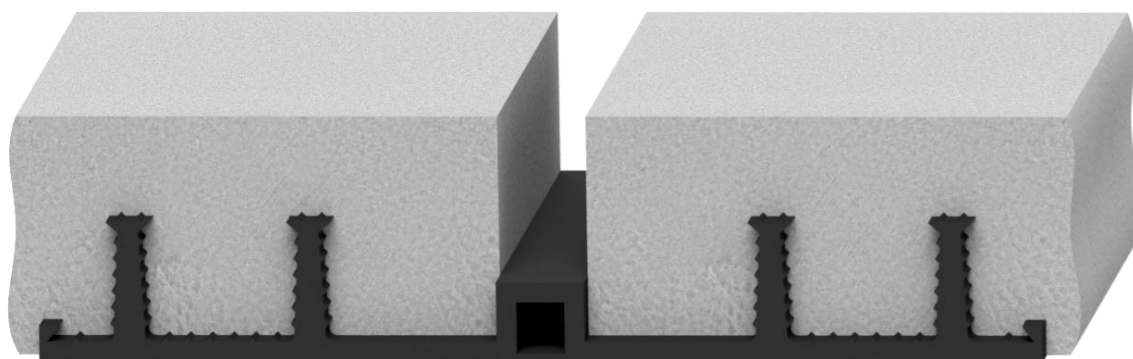
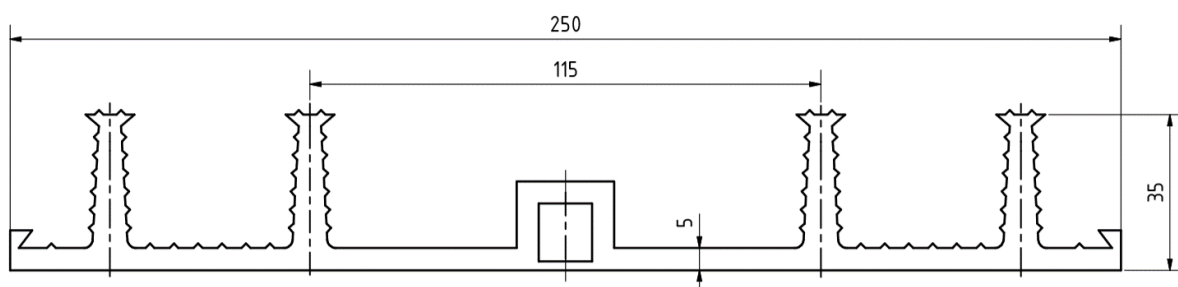


All dimensions in mm



Data sheet - series DA - WN



DA 32

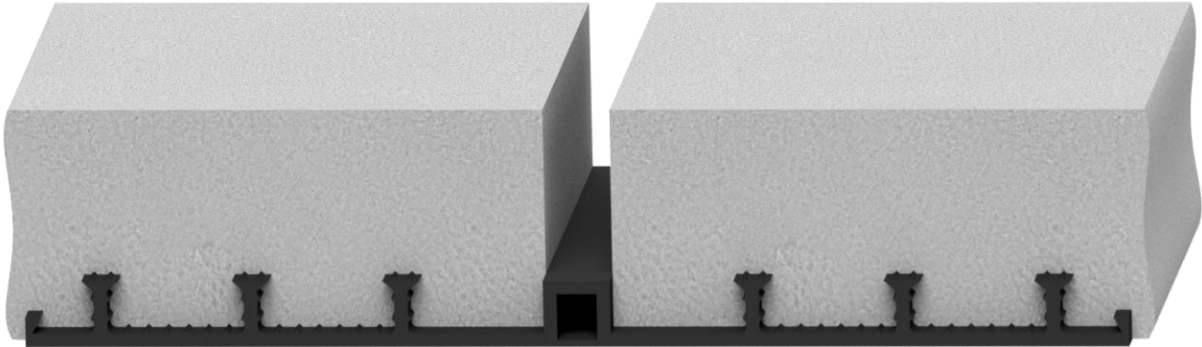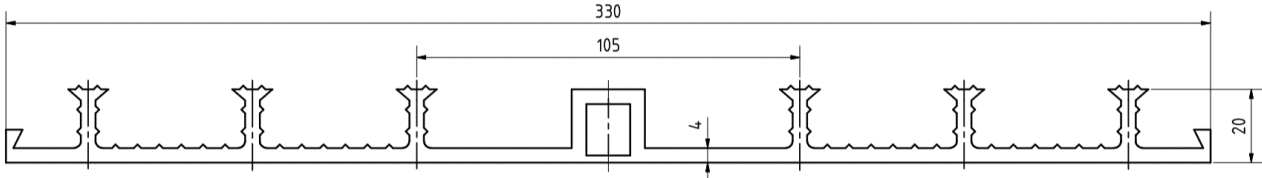

DAS 32

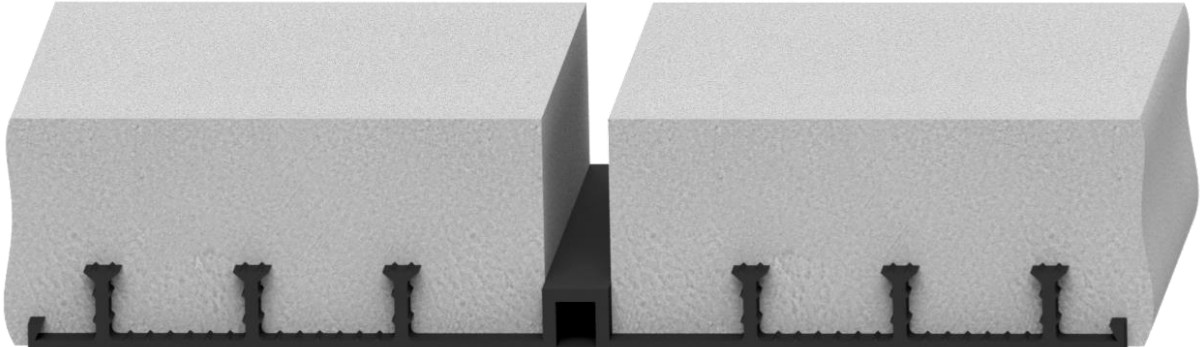
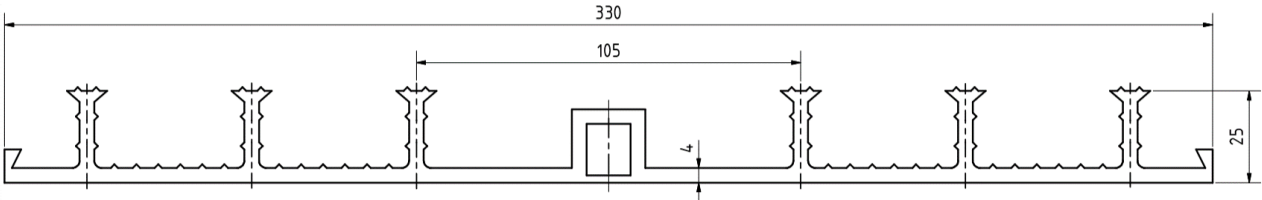


All dimensions in mm

Data sheet - series DA - WN



DA 32/3/6

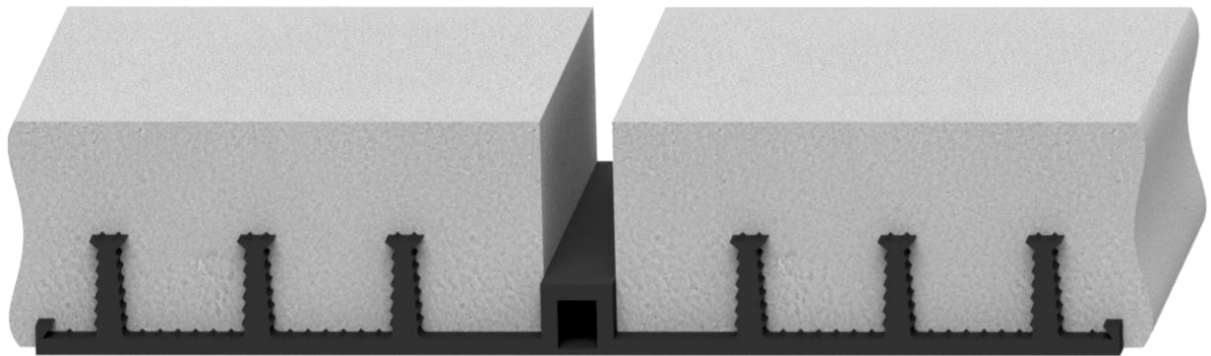
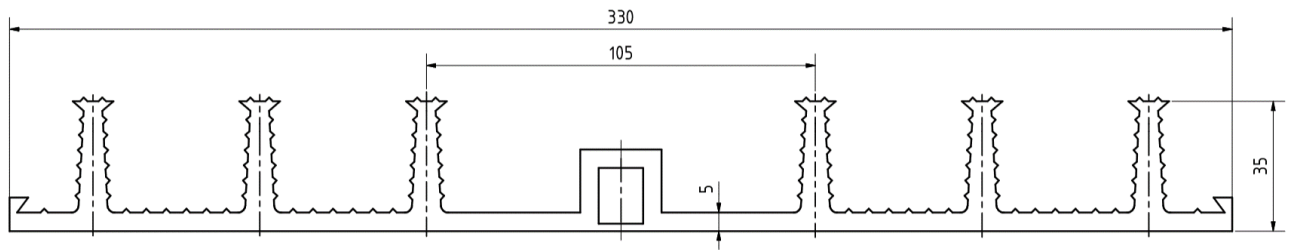


All dimensions in mm



Data sheet - series DA - WN



DA 50/2/6

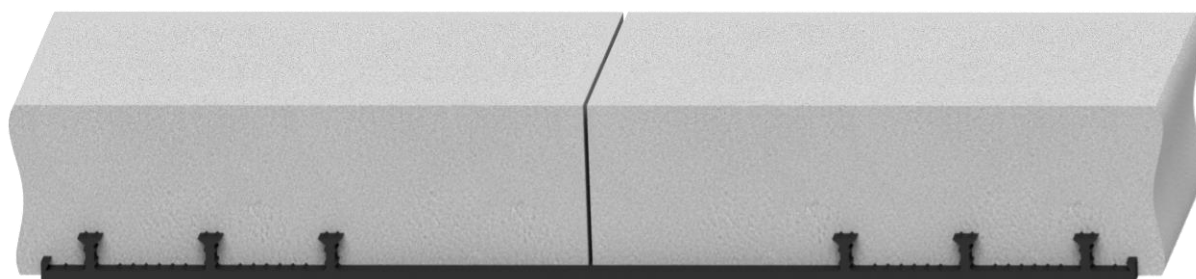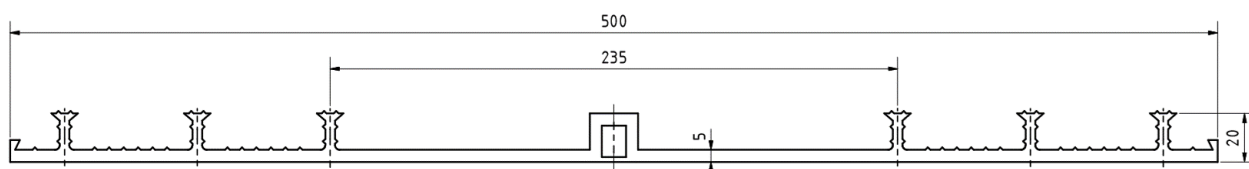

DA 50/2/8

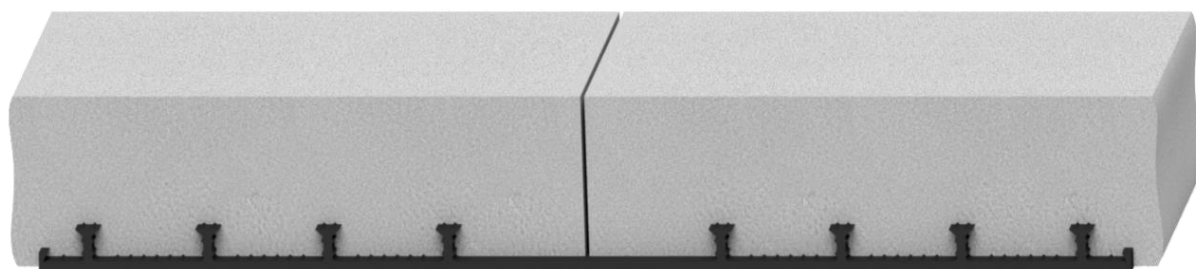
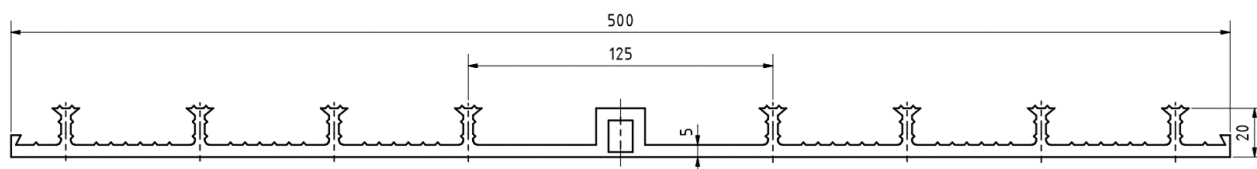


All dimensions in mm



Data sheet - series DA - WN



DA 50/3/6

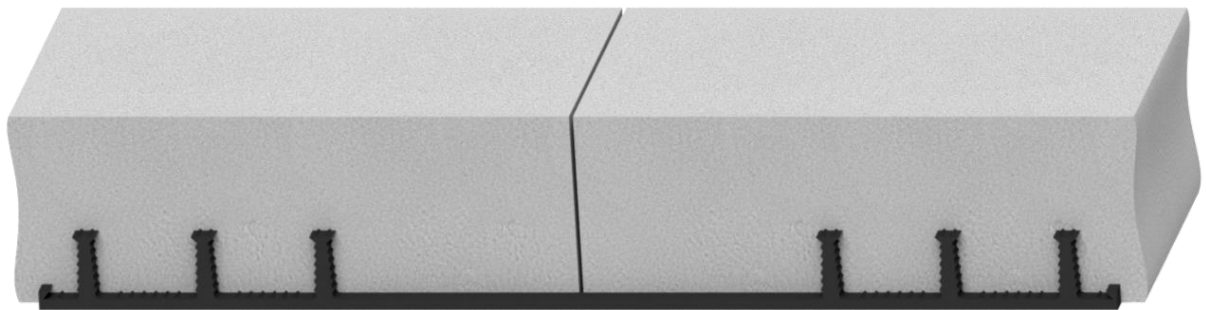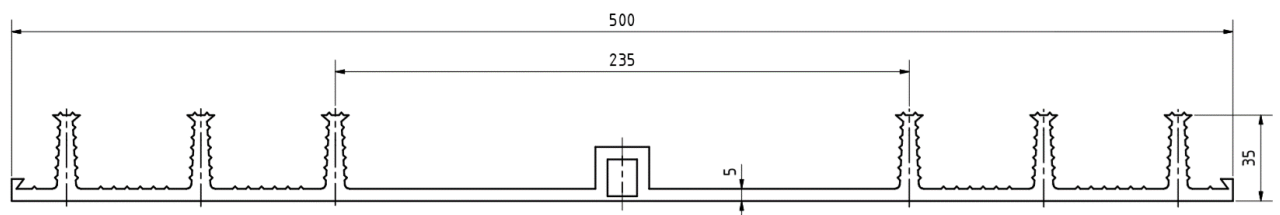

DA 50/3/8

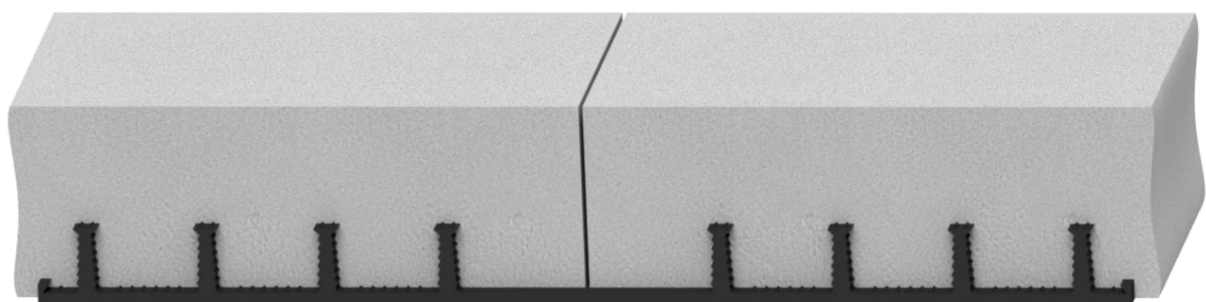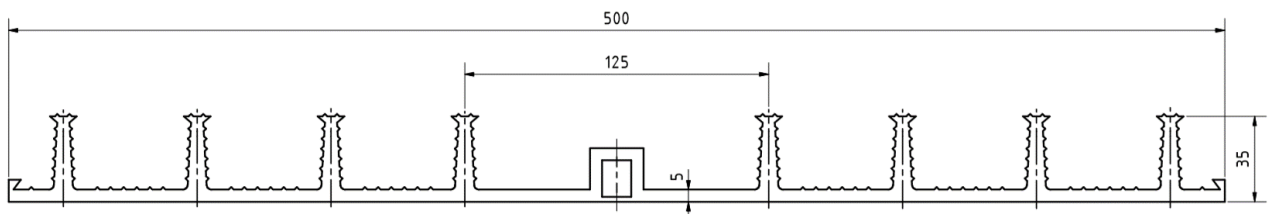

All dimensions in mm